Speedfit®

Speedfit Polybutylene Pipe is manufactured to BS7291 Part 2, Class S and is Kitemarked.

The pipe is made up of 5 layers, the centre of which

is a blue coloured oxygen barrier that prevents the ingress of air into the system, thereby reducing the effect of corrosion on metal components.



Polybutylene Barrier Pipe

- CORROSION FREE
- NO SCALE BUILDUP
- LIGHTWEIGHT AND EASY TO HANDLE
- HIGH RESISTANCE TO IMPACT
- LOW WASTAGE

PART No.

15BPB - 50C

15BPB - 100C 15BPB - 120C

15BPB - 150C

22BPB - 50C


COIL SIZE

15mm x 50m

15mm x 100m 15mm x 120m

15mm x 150m

22mm x 50m

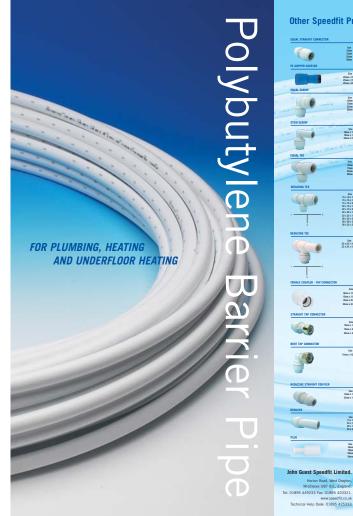

Other Speedfit Products

Middlesex UB7 8JL, England.

Technical Help Desk: 01895 425333 © Copyright 2005.



right to change the colour and shape of products. Photographs are for illustration purposes only.

www.speedfit.co.uk JG John Guest*and JG Speedfit*are registered trademarks of John Guest International Limited



FOR PLUMBING. HEATING AND UNDERFLOOR HEATING

- STRONG YET FLEXIBLE
- EASY TO INSTALL
- COIL STRAIGHT QUALITIES
- WHITE IN COLOUR



TO BS7291 PARTS 1 AND 2 CLASS S AND KITEMARKED